

The GH-Method

Viscoelastic or Viscoplastic Glucose Theory (VGT #37): Applying the VEGT or VPGT to Study Body Weight versus Sleep Score and Food Quantity to Predict Body Weight Using Viscoelastic Perturbation Model Over 13 Semi-Annual Periods from Y15H2 to Y21H2 Based on the GH-Method: Math-Physical Medicine (No. 618)

Gerald C. Hsu*

eclairMD Foundation, USA

Note: Readers who want to get a quick overview can read the abstract, results, and graphs.

Abstract

Since 2012, the author has collected his body weight and finger-piercing glucose values each day. Next, he accumulated medical conditions data including blood pressure, heart rate, and blood lipids along with lifestyle details of diet, exercise, sleep, stress, water intake and daily routine details. Based on the collected big data, he organized them into two main groups. The first group is the medical conditions (MC) with 4 categories: weight, glucose, BP, and lipids. The second group is the lifestyle details (LD) with 6 categories: food, exercise, water intake, sleep, stress, and daily routines. He collects his daily data and then calculates a unique score for each of these 10 categories, including weight (m1), sleep score (m7), and food quantity score (m9a). In this article, the author applies the viscoelasticity and viscoplasticity theories to conduct his research to discover some hidden behavior or relationship between m1 (as an output or strain) versus either m7 or m9a (as inputs or stresses). The hidden behaviors and relationships between the output biomarker for body weight m1 and the two input biomarkers, sleep score m7 and food quantity score m9a, are time-dependent which change from time to time. The following two defined equations are used to establish the stress-strain diagram in a space-domain (SD): Strain = ϵ = individual weight value at present semi-annual period. Stress = $\sigma = \eta * (d\epsilon/dt) = \eta * (d\text{-strain}/d\text{-time}) =$ (viscosity factor η using individual sleep score or food quantity score at present semi-annual period) * (weight at present year - weight at previous semi-annual period). Finally, he applies the viscoelastic perturbation model to calculate the predicted weight. Perturbed weight = strain value (weight) at present semi-annual period + stress value (weight change rate * sleep score or food quantity score) * 170, where 170 (170 lbs. of body

weight = 1.0 as the standard of m1 value) is a randomly selected amplification factor to make the "differential element of stress value" large enough to alter the predicted weight. To offer a simple explanation to readers who do not have a physics or engineering background, the author includes a brief excerpt from Wikipedia regarding the description of basic concepts for elasticity and plasticity theories, viscoelasticity and viscoplasticity theories from the disciplines of engineering and physics in the method section. In summary, the following four observations outline the findings from this research work: (1) From the time-domain (TD) waveforms, his body weight started at 175 lbs. in Y15H2, increased to 178 lbs. in Y17H1, maintained around 173 lbs. during Y18H1-Y20H1, and finally decreased to 170 lbs. during Y20H2-Y21H2. This TD strain (weight) variance can also be observed in the SD stress-strain diagrams. (2) The correlation between weight and sleep is only 61%, while the correlation between weight and food quantity is higher at 73%. This means that weight is more directly related to the food quantity during the day rather than sleeping hours. However, over the selected time period, his sleep score has been maintained approximately 61% which is satisfactory, meaning the lower the score, the better the sleep condition. While his food quantity score is a higher amount of 73%, this indicates that he consumes around 73% of his standard amount of meals. The ratio of m9a versus m7 is 1.24 (i.e., $0.73/0.61 = 1.24$). (3) From the SD stress-strain diagrams between weight vs. sleep and weight vs. food quantity, the two curves are similar in shape and appearance except for their stress scale (y-axis scale) which has a ratio of 1.24 to 1 (61% for sleep and 73% for food quantity). In addition, the two stress-strain curves demonstrate viscoplastic behavior. (4) The

Received: 13 June 2022, Accepted: 15 July 2022, Available online: 19 July 2022

*Corresponding author: Gerald C. Hsu, eclairMD Foundation, USA

comparisons for measured body weight waveform versus two predicted body weight waveforms due to sleep m7 and food quantity m9a using a viscoelastic perturbation model showed an extremely high 91% to 94% correlation with 100% prediction accuracy. The measured weight versus

the predicted weight based on sleep has a 94% correlation, while the measured weight versus the predicted weight based on food quantity has also a 91% correlation. The two high correlations further signify the importance of sleep and food quantity for weight reduction.

Keywords: Viscoelastic; Viscoplastic; Body weight; Sleep score; Food quantity

Abbreviations: MC: medical conditions; LD: lifestyle details; TD: time-domain; SD: space-domain; MPM: math-physical medicine

1. INTRODUCTION

Since 2012, the author has collected his body weight and finger-piercing glucose values each day. Next, he accumulated medical conditions data including blood pressure, heart rate, and blood lipids along with lifestyle details of diet, exercise, sleep, stress, water intake and daily routine details. Based on the collected big data, he organized them into two main groups. The first group is the medical conditions (MC) with 4 categories: weight, glucose, BP, and lipids. The second group is the lifestyle details (LD) with 6 categories: food, exercise, water intake, sleep, stress, and daily routines. He collects his daily data and then calculates a unique score for each of these 10 categories, including weight (m1), sleep score (m7), and food quantity score (m9a).

In this article, the author applies the viscoelasticity and viscoplasticity theories to conduct his research to discover some hidden behavior or relationship between m1 (as an output or strain) versus either m7 or m9a (as inputs or stresses). The hidden behaviors and relationships between the output biomarker for body weight m1 and the two input biomarkers, sleep score m7 and food quantity score m9a, are time-dependent which change from time to time.

The following two defined equations are used to establish the stress-strain diagram in a space-domain (SD):

Strain

= ϵ

= individual weight value at present semi-annual period

Stress

= σ

= $\eta * (d\epsilon/dt)$

= $\eta * (d\text{-strain}/d\text{-time})$

= (viscosity factor η using individual sleep score or food quantity score at present semi-annual period) * (weight at present year - weight at previous semi-annual period)

Finally, he applies the viscoelastic perturbation model to calculate the predicted weight.

Perturbed weight

= strain value (weight) at present semi-annual period + stress value (weight change rate * sleep score or food quantity score) * 170

Where 170 (170 lbs. of body weight = 1.0 as the standard of m1 value) is a randomly selected amplification factor to make the “differential element of stress value” large enough to alter the predicted weight.

To offer a simple explanation to readers who do not have a physics or engineering background, the author includes a brief excerpt from Wikipedia regarding the description of basic concepts for elasticity and plasticity theories, viscoelasticity and viscoplasticity theories from the disciplines of engineering and physics in the method section.

2. METHODS

2.1 Elasticity, plasticity, viscoelasticity and viscoplasticity

The difference between elastic materials and viscoelastic materials (from “Soborthans, innovating shock and vibration solutions”).

What are elastic materials?

Elasticity is the tendency of solid materials to return to their original shape after forces are applied on them. When the forces are removed, the object will return to its initial shape and size if the material is elastic.

What are viscous materials?

Viscosity is a measure of a fluid’s resistance to flow. A fluid with large viscosity resists motion. A fluid with low viscosity flows. For example, water flows more easily than syrup because it has a lower viscosity. High viscosity materials might include honey, syrups, or gels – generally things that resist flow. Water is a low viscosity material, as it flows readily. Viscous materials are thick or sticky or adhesive. Since heating reduces viscosity, these materials don’t flow easily. For example, warm syrup flows more easily than cold.

What is viscoelastic?

Viscoelasticity is the property of materials that exhibit both viscous and elastic characteristics when undergoing deformation. Synthetic polymers, wood, and human tissue, as well as metals at high temperature, display significant viscoelastic effects. In some applications, even a small viscoelastic response can be significant.

Elastic behavior versus viscoelastic behavior

The difference between elastic materials and viscoelastic materials is that viscoelastic materials have a viscosity factor and the elastic ones don't. Because viscoelastic materials have the viscosity factor, they have a strain rate dependent on time. Purely elastic materials do not dissipate energy (heat) when a load is applied, then removed; however, a viscoelastic substance does.

The following brief introductions are excerpts from Wikipedia:

“Elasticity (physics):

The physical property when materials or objects return to original shape after deformation.

In physics and materials science, elasticity is the ability of a body to resist a distorting influence and to return to its original size and shape when that influence or force is removed. Solid objects will deform when adequate loads are applied to them; if the material is elastic, the object will return to its initial shape and size after removal. This is in contrast to plasticity, in which the object fails to do so and instead remains in its deformed state.

The physical reasons for elastic behavior can be quite different for different materials. In metals, the atomic lattice changes size and shape when forces are applied (energy is added to the system). When forces are removed, the lattice goes back to the original lower energy state. For rubbers and other polymers, elasticity is caused by the stretching of polymer chains when forces are applied.

Hooke's law states that the force required to deform elastic objects should be directly proportional to the distance of deformation,


regardless of how large that distance becomes. This is known as perfect elasticity, in which a given object will return to its original shape no matter how strongly it is deformed. This is an ideal concept only; most materials which possess elasticity in practice remain purely elastic only up to very small deformations, after which plastic (permanent) deformation occurs.

In engineering, the elasticity of a material is quantified by the elastic modulus such as the Young's modulus, bulk modulus or shear modulus which measure the amount of stress needed to achieve a unit of strain; a higher modulus indicates that the material is harder to deform. The material's elastic limit or yield strength is the maximum stress that can arise before the onset of plastic deformation.

Plasticity (physics):


Deformation of a solid material undergoing non-reversible changes of shape in response to applied forces.

In physics and materials science, plasticity, also known as plastic deformation, is the ability of a solid material to undergo permanent deformation, a non-reversible change of shape in response to applied forces. For example, a solid piece of metal being bent or pounded into a new shape displays plasticity as permanent changes occur within the material itself. In engineering, the transition from elastic behavior to plastic behavior is known as yielding.

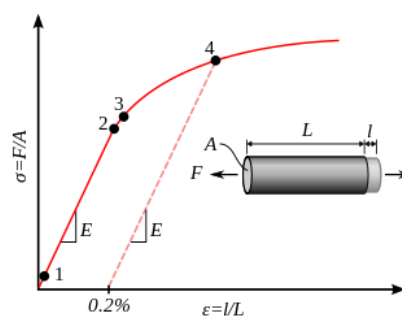

Stress–strain curve showing typical yield behavior for nonferrous alloys.

1. True elastic limit
2. Proportionality limit
3. Elastic limit
4. Offset yield strength

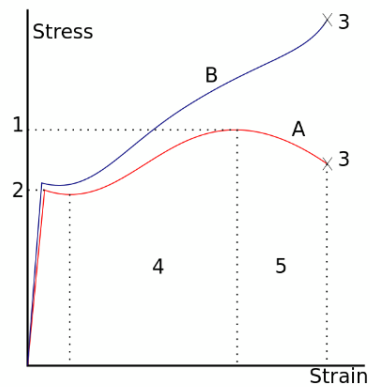

A stress–strain curve typical of structural steel.

- 1: Ultimate strength
- 2: Yield strength (yield point)
- 3: Rupture
- 4: Strain hardening region
- 5: Necking region
- A: Apparent stress (F/A_0)
- B: Actual stress (F/A)

Plastic deformation is observed in most materials, particularly metals, soils, rocks, concrete, and foams. However, the physical mechanisms that cause plastic deformation can vary widely. At a crystalline scale, plasticity in metals is usually a consequence of dislocations. Such defects are relatively rare in most crystalline materials, but are numerous in some and part of their crystal structure; in such cases, plastic crystallinity can result. In brittle materials such as rock, concrete and bone, plasticity is caused predominantly by slip at microcracks. In cellular materials such as liquid foams or biological tissues, plasticity is mainly a consequence of bubble or cell rearrangements, notably T1 processes.

For many ductile metals, tensile loading applied to a sample will cause it to behave in an elastic manner. Each increment of load is accompanied by a proportional increment in extension. When the load is removed, the piece returns to its original size. However, once the load exceeds a threshold – the yield strength – the extension increases more rapidly than in the elastic region; now when the load is removed, some degree of extension will remain.

Elastic deformation, however, is an approximation and its quality depends on the time frame considered and loading speed. If,

as indicated in the graph opposite, the deformation includes elastic deformation, it is also often referred to as "elasto-plastic deformation" or "elastic-plastic deformation".

Perfect plasticity is a property of materials to undergo irreversible deformation without any increase in stresses or loads. Plastic materials that have been hardened by prior deformation, such as cold forming, may need increasingly higher stresses to deform further. Generally, plastic deformation is also dependent on the deformation speed, i.e. higher stresses usually have to be applied to increase the rate of deformation. Such materials are said to deform viscoplastically.”

Viscoelasticity:

Property of materials with both viscous and elastic characteristics under deformation.

In materials science and continuum mechanics, viscoelasticity is the property of materials that exhibit both viscous and elastic characteristics when undergoing deformation. Viscous materials, like water, resist shear flow and strain linearly with time when a stress is applied. Elastic materials strain when stretched and immediately return to their original state once the stress is removed.

Viscoelastic materials have elements of both of these properties and, as such, exhibit time-dependent strain. Whereas elasticity is usually the result of bond stretching along crystallographic planes in an ordered solid, viscosity is the result of the diffusion of atoms or molecules inside an amorphous material.

In the nineteenth century, physicists such as Maxwell, Boltzmann, and Kelvin researched and experimented with creep and recovery of glasses, metals, and rubbers. Viscoelasticity was further examined in the late twentieth century when synthetic polymers were engineered and used in a variety of applications. Viscoelasticity calculations depend heavily on the viscosity variable, η . The inverse of η is also known as fluidity, ϕ . The value of either can be derived as a function of temperature or as a given value (i.e., for a dashpot).

Depending on the change of strain rate versus stress inside a material, the viscosity


can be categorized as having a linear, non-linear, or plastic response. When a material exhibits a linear response, it is categorized as a Newtonian material. In this case the stress is linearly proportional to the strain rate. If the material exhibits a non-linear response to the strain rate, it is categorized as non-Newtonian fluid. There is also an interesting case where the viscosity decreases as the shear/strain rate remains constant. A material which exhibits this type of behavior is known as thixotropic. In addition, when the stress is independent of this strain rate, the material exhibits plastic deformation. Many viscoelastic materials exhibit rubber like behavior explained by the thermodynamic theory of polymer elasticity.

Cracking occurs when the strain is applied quickly and outside of the elastic limit. Ligaments and tendons are viscoelastic, so the extent of the potential damage to them depends both on the rate of the change of their length as well as on the force applied.

A viscoelastic material has the following properties:

- hysteresis is seen in the stress–strain curve
- stress relaxation occurs: step constant strain causes decreasing stress
- creep occurs: step constant stress causes increasing strain
- its stiffness depends on the strain rate or the stress rate.

Elastic versus viscoelastic behavior

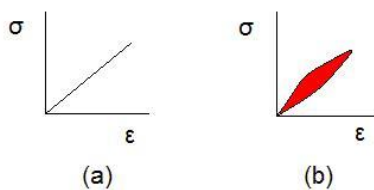

Stress–strain curves for a purely elastic material (a) and a viscoelastic material (b). The red area is a hysteresis loop and shows the amount of energy lost (as heat) in a loading and unloading cycle. It is equal to

$$\oint \sigma d\epsilon$$

where σ is stress and ϵ is strain.

Unlike purely elastic substances, a viscoelastic substance has an elastic component and a viscous component. The viscosity of a viscoelastic substance gives the substance a strain rate dependence on time. Purely elastic materials do not dissipate energy (heat) when a load is applied, then removed. However, a viscoelastic substance dissipates energy when a load is applied, then removed. Hysteresis is observed in the stress–strain curve, with the area of the loop being equal to the energy lost during the loading cycle. Since viscosity is the resistance to thermally activated plastic deformation, a viscous material will lose energy through a loading cycle. Plastic deformation results in lost energy, which is uncharacteristic of a purely elastic material's reaction to a loading cycle.

Specifically, viscoelasticity is a molecular rearrangement. When a stress is applied to a viscoelastic material such as a polymer, parts of the long polymer chain change positions. This movement or rearrangement is called “creep”. Polymers remain a solid material even when these parts of their chains are rearranging in order to accompany the stress, and as this occurs, it creates a back stress in the material. When the back stress is the same magnitude as the applied stress, the material no longer creeps. When the original stress is taken away, the accumulated back stresses will cause the polymer to return to its original form. The material creeps, which gives the prefix visco-, and the material fully recovers, which gives the suffix -elasticity.

Viscoplasticity:

Viscoplasticity is a theory in continuum mechanics that describes the rate-dependent inelastic behavior of solids. Rate-dependence in this context means that the deformation of the material depends on the rate at which loads are applied. The inelastic behavior that is the subject of viscoplasticity is plastic deformation which means that the material undergoes unrecoverable deformations when a load level is reached. Rate-dependent plasticity is important for transient plasticity calculations. The main difference between rate-independent plastic and viscoplastic material models is that the latter exhibit not only permanent deformations after the application of loads but continue to undergo a creep flow as a function of time under the influence of the applied load.

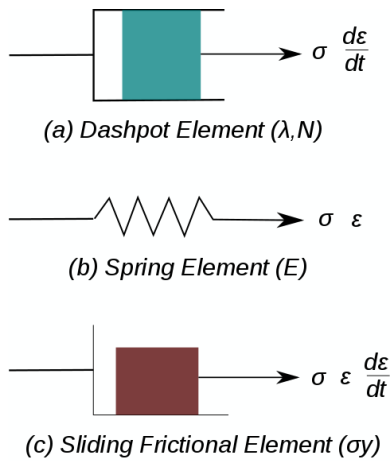


Figure 1. Elements used in one-dimensional models of viscoplastic materials.

The elastic response of viscoplastic materials can be represented in one-dimension by Hookean spring elements. Rate-dependence can be represented by nonlinear dashpot elements in a manner similar to viscoelasticity. Plasticity can be accounted for by adding sliding frictional elements as shown in Figure 1. In the figure E is the modulus of elasticity, λ is the viscosity parameter and N is a power-law type parameter that represents non-linear dashpot [$\sigma(d\epsilon/dt) = \sigma = \lambda(d\epsilon/dt)^{1/N}$]. The sliding element can have a yield stress (σ_y) that is strain rate dependent, or even constant, as shown in Figure 1c.

Viscoplasticity is usually modeled in three-dimensions using overstress models of the Perzyna or Duvaut-Lions types. In these models, the stress is allowed to increase beyond the rate-independent yield surface upon application of a load and then allowed to relax back to the yield surface over time. The yield surface is usually assumed not to be rate-dependent in such models. An alternative approach is to add a strain rate dependence to the yield stress and use the techniques of rate independent plasticity to calculate the response of a material.

For metals and alloys, viscoplasticity is the macroscopic behavior caused by a mechanism linked to the movement of dislocations in grains, with superposed effects of inter-crystalline gliding. The mechanism usually becomes dominant at temperatures greater than approximately one third of the absolute melting temperature. However, certain alloys exhibit viscoplasticity at room temperature

(300K). For polymers, wood, and bitumen, the theory of viscoplasticity is required to describe behavior beyond the limit of elasticity or viscoelasticity.

In general, viscoplasticity theories are useful in areas such as

- the calculation of permanent deformations,
- the prediction of the plastic collapse of structures,
- the investigation of stability,
- crash simulations,
- systems exposed to high temperatures such as turbines in engines, e.g. a power plant,
- dynamic problems and systems exposed to high strain rates.

Phenomenology

For a qualitative analysis, several characteristic tests are performed to describe the phenomenology of viscoplastic materials. Some examples of these tests are

1. hardening tests at constant stress or strain rate,
2. creep tests at constant force, and
3. stress relaxation at constant elongation.

Strain hardening test

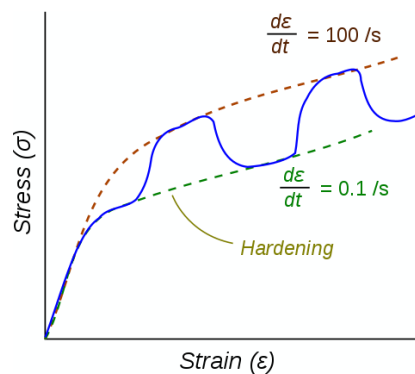


Figure 2. Stress–strain response of a viscoplastic material at different strain rates.

The dotted lines show the response if the strain-rate is held constant. The blue line shows the response when the strain rate is changed suddenly.

One consequence of yielding is that as plastic deformation proceeds, an increase in stress is

required to produce additional strain. This phenomenon is known as Strain/Work hardening. For a viscoplastic material the hardening curves are not significantly different from those of rate-independent plastic material. Nevertheless, three essential differences can be observed.

1. At the same strain, the higher the rate of strain the higher the stress.
2. A change in the rate of strain during the test results in an immediate change in the stress–strain curve.
3. The concept of a plastic yield limit is no longer strictly applicable.

The hypothesis of partitioning the strains by decoupling the elastic and plastic parts is still applicable where the strains are small, i.e.,

$$\epsilon = \epsilon_e + \epsilon_{vp}$$

where ϵ_e is the elastic strain and ϵ_{vp} is the viscoplastic strain.

To obtain the stress–strain behavior shown in blue in the figure, the material is initially loaded at a strain rate of 0.1/s. The strain rate is then instantaneously raised to 100/s and held constant at that value for some time. At the end of that time period the strain rate is dropped instantaneously back to 0.1/s and the cycle is continued for increasing values of strain. There is clearly a lag between the strain-rate change and the stress response. This lag is modeled quite accurately by overstress models (such as the Perzyna model) but not by models of rate-independent plasticity that have a rate-dependent yield stress.”

Note: For a more detailed description, please refer to the “consolidated method” section which is given at the beginning of the special issue.

3. RESULTS

Figure 1 displays the data table and calculated results of this study.

Figure 2 shows the correlations in TD between weight versus both sleep and food quantity.

Figure 3 illustrates the results of two stress-strain diagrams based on sleep and food

quantity, respectively, from the viscoelastic or viscoplastic study for this case. A combined stress-strain diagram is also shown.

m1 vs m7 & m9a	3/1/22	Strain (Weight)	Stress (Sleep)	Sleep m7	3/1/22	Strain (Weight)	Stress (Food)	Food Quantity m9a	3/1/22	Measured Weight	Pred. Weight (Sleep)	Pred. Weight (Food)
Y1502	1.0209	0.0000	0.6289	Y1502	1.0209	0.0000	0.7645	Y1502	175	175	175	175
Y1501	1.0171	-0.0082	0.6427	Y1501	1.0171	-0.0116	0.8025	Y1501	173	172	171	171
Y1502	1.0204	0.0072	0.6385	Y1502	1.0204	0.0098	0.8638	Y1502	175	176	176	176
Y1501	1.0184	0.0118	0.6222	Y1501	1.0175	0.0138	0.8294	Y1501	176	180	181	181
Y1502	1.0225	-0.0148	0.6182	Y1502	1.0222	-0.0209	0.8672	Y1502	174	171	170	170
Y1501	1.0158	-0.0047	0.6277	Y1501	1.0158	-0.0028	0.8423	Y1501	173	172	171	171
Y1502	1.0175	0.0011	0.6205	Y1502	1.0172	0.0014	0.8284	Y1502	173	173	173	173
Y1501	1.0201	0.0016	0.6156	Y1501	1.0200	0.0021	0.8034	Y1501	173	174	174	174
Y1502	1.0242	0.0026	0.6380	Y1502	1.0242	0.0038	0.7241	Y1502	174	175	175	175
Y2001	1.0169	-0.0044	0.5989	Y2001	1.0169	-0.0050	0.6885	Y2001	173	172	172	172
Y2002	0.9982	-0.0114	0.6081	Y2002	0.9982	-0.0116	0.6194	Y2002	170	168	168	168
Y2101	1.0004	0.0013	0.5811	Y2101	1.0004	0.0011	0.5922	Y2101	170	170	170	170
Y2102	1.0009	-0.0001	0.5981	Y2102	1.0009	-0.0001	0.5390	Y2102	170	170	170	170
Average	1.0184	-0.0114	0.6186	Average	1.0184	-0.0027	0.7638	Average	173	173	173	173
Correlation			61%	Correlation			73%	Correlation	100%	94%	95%	95%
								Accuracy	100%	100%	100%	100%

Figure 1: Data table and calculation results of this study.



Figure 2: Comparison of weight vs. sleep and food quantity.



Figure 3: Viscoplastic stress-strain diagrams.

Figure 4 reflects the comparison between measured weight versus two predicted weights using the viscoelastic perturbation model.



Figure 4: Predicted weight using visco-perturbation model vs. measured weight.

4. CONCLUSION

In summary, the following four observations outline the findings from this research work:

(1) From the time-domain (TD) waveforms, his body weight started at 175 lbs. in Y15H2, increased to 178 lbs. in Y17H1, maintained around 173 lbs. during Y18H1-Y20H1, and finally decreased to 170 lbs. during Y20H2-Y21H2. This TD strain (weight) variance can also be observed in the SD stress-strain diagrams.

(2) The correlation between weight and sleep is only 61%, while the correlation between weight and food quantity is higher at 73%. This means that weight is more directly related to the food quantity during the day rather than sleeping hours. However, over the selected time period, his sleep score has been maintained approximately 61% which is satisfactory, meaning the lower the score, the better the sleep condition. While his food

quantity score is a higher amount of 73%, this indicates that he consumes around 73% of his standard amount of meals. The ratio of m9a versus m7 is 1.24 (i.e. $0.73/0.61 = 1.24$).

(3) From the SD stress-strain diagrams between weight vs. sleep and weight vs. food quantity, the two curves are similar in shape and appearance except for their stress scale (y-axis scale) which has a ratio of 1.24 to 1 (61% for sleep and 73% for food quantity). In addition, the two stress-strain curves demonstrate viscoplastic behavior.

(4) The comparisons for measured body weight waveform versus two predicted body weight waveforms due to sleep m7 and food quantity m9a using a viscoelastic perturbation model showed an extremely high 91% to 94% correlation with 100% prediction accuracy. The measured weight versus the predicted weight based on sleep has a 94% correlation, while the measured weight versus the predicted weight based on food quantity has also a 91% correlation. The two high correlations further signify the importance of sleep and food quantity for weight reduction.

5. REFERENCES

For editing purposes, the majority of the references in this paper, which are self-references, have been removed. Only references from other authors' published sources remain. The bibliography of the author's original self-references can be viewed at www.eclaircmd.com.

Readers may use this article as long as the work is properly cited, their use is educational and not for profit, and the author's original work is not altered.

Viscoelastic and Viscoplastic Glucose Theory Application in Medicine

Gerald C. Hsu

