

The GH-Method

Viscoelastic or Viscoplastic Glucose Theory (VGT #87): An Investigation on the Influences of Cardiovascular Disease Risk % from the Estimated Daily Average Glucose, Body Weight, and Food Quantity % of the Normal Portion from a Type 2 Diabetes Patient Over 11 Years from Y2012 to Y2022 Based on GH-Method: Math-Physical Medicine, Especially the VGT Tool (No. 677)

Gerald C. Hsu*

eclairMD Foundation, USA

Abstract

The author is a mathematician and engineer who has conducted medical research work over the past 13 years in the fields of endocrinology, metabolic disorder-induced chronic diseases (especially diabetes), and their resulting various medical complications. Thus far, he has written and published 676 research papers in various journals using different math-physical medicine methodologies (MPM). Beginning with paper No. 578 dated 1/8/2022, he has written a total of 82 medical research and 4 economic research papers using viscoelasticity and viscoplasticity theories (VGT) tools from physics and engineering disciplines. These 86 papers aim to explore some hidden physical behaviors and provide a deeper quantitative understanding of the inter-relationships of a selected output (or symptom) versus singular input or multiple inputs (or root causes, risk factors, influential factors). The hidden biophysical behaviors and possible inter-relationships exist among lifestyle details, medical conditions, chronic diseases, and certain severe medical complications, such as heart attacks, stroke, cancers, dementia, and even longevity concerns. The chosen medical subjects with their associated data, multiple symptoms, and influential factors are “time-dependent” which means that all biomedical variables change from time to time because body living cells are dynamically changing. This is what Professor Norman Jones, the author’s adviser at MIT, suggested to him in December 2021 and why he utilizes the VGT tools from physics and engineering to conduct his medical research work since then. Papers No. 671 through No. 674 focused on the COVID infectious disease using three key US economic measurements. From this economic exercise, he realized that the established

theory of viscoelasticity and viscoplasticity (from the physics branch of science) should not only be limited to a small scope of engineering applications. Its ability to link certain time-dependent variables and their physical characteristics and associated energy estimation via the hysteresis loop area are equally powerful for applications in many other fields, including economics and medicine. The author would like to describe the essence of the VGT in 6 simple steps in plain English instead of mathematical equations for readers who do not have an extensive academic background in engineering, physics & mathematics - an excerpt from Wikipedia is included in the Method section of the full-text article. In this article, the first step is to collect the output data (strain or ϵ) on a time scale, e.g. quarterly cardiovascular disease (CVD) risk, gross domestic product (GDP), or postprandial plasma glucose (PPG). The second step is to calculate the output change rate with time ($d\epsilon/dt$), e.g. the change rate of averaged PPG over each year. The third step is to collect the input data (viscosity or η) on a time scale, e.g. annual average numbers of estimated average glucose (eAG), fasting plasma glucose (FPG), carbohydrates/sugar (carbs) intake amounts, post-meal walking k-steps (k-steps), body weight (BW) and food quantity. The fourth step is to calculate the time-dependent input (time-dependent stress or σ) by multiplying $d\epsilon/dt$ and η together. (This “time-dependent input equation” is: stress $\sigma =$ strain change rate of $d\epsilon/dt * \text{viscosity } \eta$). The fifth step is to plot the input-output (i.e. stress-strain or cause-symptom) curve in a space domain (x-axis versus y-axis) with strain (output or symptom) on the x-axis; and stresses (time-dependent inputs, causes, or stresses) on the y-axis. The sixth step is to calculate the total enclosed area within these

input-output curves (or hysteresis loop areas) which is also the indicator of associated energies (either created energy or dissipated energy) of this dataset of input and output. These energy values can also be considered the degrees of influence on output by inputs. After providing this description, he would like to use the following re-defined VGT equation to address the unique “time-dependency characteristics” of engineering, economics, and medical variables. He can then establish a set of generalized stress-strain equations which can be displayed in a two-dimensional space domain (SD). Strain = ε = individual strain value at the present quarter. Stress = σ (based on the change rate of strain multiplying with a chosen viscosity factor η , e.g. COVID infection case) = $\eta * (d\varepsilon/dt) = \eta * (d\text{-strain}/d\text{-time}) = (\text{viscosity factor } \eta \text{ using individual viscosity factor at present quarter}) * (\text{strain at present quarter} - \text{strain at previous quarter})$. These inputs (causes or viscosity factors) are further normalized by dividing them by the average viscosity number or a certain established health standard, such as 120 mg/dL for glucose or 25 for BMI and 170 lbs. for his ideal body weight. The normalization process can remove the dependency of the individual unit or certain unique characteristics associated with each viscosity factor. This process allows him to modify these variables into a set of “dimensionless variables” for easier numerical comparison and interpretation of results. In addition, using a time-domain analysis (TD), he conducted a straightforward statistical correlation analysis among 4 variables: CVD risk, eAG, BW, and food quantity. In summary, there are 3 observations from this VGT analysis of CVD Risk % versus eAG, body weight, and food quantity %: (1) From the time domain analysis of the collected data from 11 years (Figure 1), the calculated correlations are: CVD vs. eAG = 81%; CVD vs. BW = 93%; CVD vs. FOOD = 77%. It is obvious that the statistical correlation analysis results have shown that, with a sufficiently large time window of 11-year data, 3 high positive correlations are observed with CVD risk % versus eAG, BW, and food quantity %, respectively. Nevertheless, the following biomedical observation holds true that both diabetes (eAG) and obesity (BW) together determine the degree of risk of having CVD episodes due to a patient’s lifestyle management, especially the food portion % (along with food

quality) which directly contributes to BW, while food quality, such as carbs, would influence both of CVD risk and diabetes conditions. (2) Researching the part of strain variation from the VGT results (Figure 2), we have seen that his CVD risk % decreased from 86% in Y2013 to 52% in Y2021. His eAG started at 128 mg/dL in Y2012 to 135 mg/dL in Y2014 and then dropped to 105 mg/dL in Y2021. His body weight started at 189 lbs. in Y2012 and decreased to 169 lbs. in Y2021. His food portion % started from 110% in Y2012 and decreased to 53% in Y2022. Generally speaking, all 3 biomarkers, CVD risk, eAG, BW, and his lifestyle’s food portion % are decreasing year after year. It should be pointed out that the strain (CVD) change rates determine the basic waveform patterns of the 3 stress-strain curves resulting from eAG, BW, and food %. (3) Researching the stress-strain diagrams from the VGT analysis results (Figure 2), the 3 stress-strain curves’ general waveform patterns are similar to each other due to their identical strain (CVD) change rates. However, the 3 different normalized viscosities, i.e. eAG, BW, and food, decide the final detailed shapes and hysteresis loop areas of the 3 stress-strain curves. The combination of strain and stress components affects the actual size of the hysteresis loop area or its associated energy level, i.e. the degree of influence of the stresses on the strain. The conclusive observation from this stress-strain diagram is that eAG has generated the largest share of energy 302 (36%) which means eAG (diabetes) has the largest influence on CVD Risk followed by body weight (obesity) of 288 (34%) and food portion of 258 (30%). Another important observation is that the first 5-year sub-period of Y2012-Y2016 contributed 796 (94%) of the total CVD risk over the 11 years while the subsequent 6-year sub-period of Y2017-Y2022 contributed 52 (6%) of the total CVD risk over the 11 years. This VGT energy tool adopted from engineering and physics can indeed provide some interesting clues for useful interpretation of results from this particular research work on CVD Risk versus eAG, body weight, and food portion %. If the author continues his “bad” stress-strain pattern of the first sub-period into the second sub-period, his health and life would be seriously threatened by the possibility of having either heart attack or stroke and most likely would not be able to live into the year of 2022.

Keywords: Viscoelastic; Viscoplastic; Cardiovascular disease; Body weight; Food quantity; Postprandial plasma glucose; Fasting plasma glucose; Type 2 diabetes; COVID-19

Abbreviations: eAG: estimated average glucose; BW: body weight; CVD: cardiovascular disease; GDP: gross domestic product; PPG: postprandial plasma glucose; FPG: fasting plasma glucose; SD: space domain; TD: time domain; MPM: math-physical medicine

1. INTRODUCTION

The author is a mathematician and engineer who has conducted medical research work over the past 13 years in the fields of endocrinology, metabolic disorder-induced chronic diseases (especially diabetes), and their resulting various medical complications. Thus far, he has written and published 676 research papers in various journals using different math-physical medicine methodologies (MPM).

Beginning with paper No. 578 dated 1/8/2022, he has written a total of 82 medical research and 4 economic research papers using viscoelasticity and viscoplasticity theories (VGT) tools from physics and engineering disciplines. These 86 papers aim to explore some hidden physical behaviors and provide a deeper quantitative understanding of the inter-relationships of a selected output (or symptom) versus singular input or multiple inputs (or root causes, risk factors, influential factors). The hidden biophysical behaviors and possible inter-relationships exist among lifestyle details, medical conditions, chronic diseases, and certain severe medical complications, such as heart attacks, stroke, cancers, dementia, and even longevity concerns. The chosen medical subjects with their associated data, multiple symptoms, and influential factors are “time-dependent” which means that all biomedical variables change from time to time because body living cells are dynamically changing. This is what Professor Norman Jones, the author’s adviser at MIT, suggested to him in December 2021 and why he utilizes the VGT tools from physics and engineering to conduct his medical research work since then.

Papers No. 671 through No. 674 focused on the COVID infectious disease using three key US economic measurements. From this economic exercise, he realized that the established theory of viscoelasticity and viscoplasticity (from the physics branch of science) should not only be limited to a small scope of engineering applications. Its ability to link certain time-dependent variables and their physical characteristics and associated energy estimation via the hysteresis loop area are equally powerful for applications in many other fields, including economics and medicine.

The author would like to describe the essence of the VGT in 6 simple steps in plain English instead of mathematical equations for readers who do not have an extensive academic background in engineering, physics & mathematics - an excerpt from Wikipedia is included in the Method section of the full-text article.

In this article, the first step is to collect the output data (strain or ϵ) on a time scale, e.g. quarterly cardiovascular disease (CVD) risk, gross domestic product (GDP), or postprandial plasma glucose (PPG). The second step is to calculate the output change rate with time ($d\epsilon/dt$), e.g. the change rate of averaged PPG over each year. The third step is to collect the input data (viscosity or η) on a time scale, e.g. annual average numbers of estimated average glucose (eAG), fasting plasma glucose (FPG), carbohydrates/sugar (carbs) intake amounts, post-meal walking k-steps (k-steps), body weight (BW) and food quantity. The fourth step is to calculate the time-dependent input (time-dependent stress or σ) by multiplying $d\epsilon/dt$ and η together. (This “time-dependent input equation” is: stress $\sigma =$ strain change rate of $d\epsilon/dt *$ viscosity η). The fifth step is to plot the input-output (i.e. stress-strain or cause-symptom) curve in a space domain (x-axis versus y-axis) with strain (output or symptom) on the x-axis; and stresses (time-dependent inputs, causes, or stresses) on the y-axis. The sixth step is to calculate the total enclosed area within these input-output curves (or hysteresis loop areas) which is also the indicator of associated energies (either created energy or dissipated energy) of this dataset of input and output. These energy values can also be considered the degrees of influence on output by inputs.

After providing this description, he would like to use the following re-defined VGT equation to address the unique “time-dependency characteristics” of engineering, economics, and medical variables. He can then establish a set of generalized stress-strain equations which can be displayed in a two-dimensional space domain (SD).

Strain
 $= \epsilon$
 $=$ individual strain value at the present quarter

Stress

= σ (based on the change rate of strain multiplying with a chosen viscosity factor η , e.g. COVID infection case)
 = $\eta * (d\epsilon/dt)$
 = $\eta * (d\text{-strain}/d\text{-time})$
 = (viscosity factor η using individual viscosity factor at present quarter) * (strain at present quarter - strain at previous quarter)

These inputs (causes or viscosity factors) are further normalized by dividing them by the average viscosity number or a certain established health standard, such as 120 mg/dL for glucose or 25 for BMI and 170 lbs. for his ideal body weight. The normalization process can remove the dependency of the individual unit or certain unique characteristics associated with each viscosity factor. This process allows him to modify these variables into a set of “dimensionless variables” for easier numerical comparison and interpretation of results.

In addition, using a time-domain analysis (TD), he conducted a straightforward statistical correlation analysis among 4 variables: CVD risk, eAG, BW, and food quantity.

2. METHODS**2.1 The author’s case of diabetes**

The author has been a severe T2D patient since 1996. He weighed 220 lb. (100 kg, BMI 32.5) at that time. By 2010, he still weighed 198 lb. (BMI 29.2) with average daily glucose of 250 mg/dL (HbA1C of 10%). During that year, his triglycerides reached 1161 and albumin-creatinine ratio (ACR) at 116. He also suffered from five cardiac episodes within a decade. In 2010, three independent physicians warned him regarding his need for kidney dialysis treatment and his future high risk of dying from his severe diabetic complications. Other than the cerebrovascular disease (stroke), he has suffered most of the known diabetic complications, including both macro-vascular and micro-vascular complications.

In 2010, he decided to launch his self-study on endocrinology, diabetes, and food nutrition to save his own life. During 2015 and 2016, he developed four prediction models related to diabetes conditions: weight, PPG, fasting

plasma glucose (FPG), and A1C. As a result, from using his developed mathematical metabolism index (MI) model in 2014 and the four prediction tools, by end of 2016, his weight was reduced from 220 lbs. (100 kg, BMI 32.5) to 176 lbs. (89 kg, BMI 26.0), waistline from 44 inches (112 cm) to 33 inches (84 cm), average finger glucose reading from 250 mg/dL to 120 mg/dL, and lab-tested A1C from 10% to ~6.5%. One of his major accomplishments is that he no longer takes any diabetes medications as of 12/8/2015.

In 2017, he has achieved excellent results on all fronts, especially glucose control. However, during the pre-COVID period of 2018 and 2019, he traveled to approximately 50+ international cities to attend 65+ medical conferences and made ~120 oral presentations. This hectic schedule inflicted damage to his diabetes control, through dining out frequently, post-meal exercise disruption, jet lag, and along with the overall metabolic impact due to his irregular life patterns through a busy travel schedule; therefore, his glucose control and overall metabolism state were somewhat affected during this two-year heavier traveling period.

Since 2020, living in a COVID-19 quarantined lifestyle, not only has he published 400+ medical papers in 100+ journals, but he has also reached his best health conditions in the past 26 years. By the beginning of 2022, his weight was further reduced to 168 lbs. (BMI 24.8) along with a 5.8% A1C value (beginning level of pre-diabetes), without having any medication interventions or insulin injections. These good results are due to his non-traveling, low-stress, and regular daily life routines. Of course, his knowledge of chronic diseases, practical lifestyle management experiences, and development of various high-tech tools contribute to his excellent health status since 1/19/2020, the beginning date of his self-quarantined life.

On 5/5/2018, he applied a continuous glucose monitoring (CGM) sensor device on his upper arm and checks his glucose measurements every 5 minutes for a total of ~288 times each day. He has maintained the same measurement pattern to the present day. In his research work, he uses his CGM sensor glucose at a time interval of 15 minutes (96 data per day). Incidentally, the difference in

average sensor glucoses between 5-minute intervals and 15-minute intervals is only 0.7% (average glucose of 112.15 mg/dL for 5-minutes and average glucose of 111.33 mg/dL for 15-minutes with a correlation of 96% between these two sensor glucose curves) during the period from 2/19/20- to 5/9/22.

Therefore, over the past 12 years, he could study and analyze the collected ~3 million data regarding his health status, medical conditions, and lifestyle details. He applies his knowledge, models, and tools from mathematics, physics, engineering, and computer science to conduct his medical research work. His research is based on the aims of achieving both “high precision” with “quantitative proof” in the medical findings.

The following timetable provides a rough sketch of the emphasis in his medical research during each stage:

2000-2013: Self-study diabetes and food nutrition, developing a data collection and analysis software.

2014: Develop a mathematical model of metabolism, using engineering modeling and advanced mathematics.

2015: Weight & FPG prediction models, using neuroscience.

2016: PPG & HbA1C prediction models, using optical physics, artificial intelligence (AI), and neuroscience.

2017: Complications due to macro-vascular research, such as Cardiovascular disease (CVD), coronary heart diseases (CHD), and stroke, using pattern analysis and segmentation analysis.

2018: Complications due to micro-vascular research such as kidney (CKD), bladder, foot, and eye issues (DR).

2019: CGM big data analysis, using wave theory, energy theory, frequency domain analysis, quantum mechanics, and AI.

2020: Cancer, dementia, longevity, geriatrics, DR, hypothyroidism, diabetic foot, diabetic fungal infection, and linkage between metabolism and immunity, learning about certain infectious diseases, such as COVID-19.

2021: Applications of linear elastic glucose theory (LEGT) and perturbation theory from quantum mechanics on medical research subjects, such as chronic diseases and their complications, cancer, and dementia.

2022: Applications of viscoelastic/viscoplastic glucose theory (LEGT) on 81 biomedical research cases.

Again, to date, he has spent around 40,000 hours self-studying and researching medicine. He has collected and calculated more than three million pieces of data regarding his medical conditions and lifestyle details. In addition, he has written 676 medical research notes and published ~600 papers in 100+ various medical and engineering journals. Moreover, he has also given ~120 presentations at ~65 international medical conferences. He has continuously dedicated his time (11-12 hours per day and work each day of a year, without rest) and efforts to his medical research work and shared his findings and learnings with other patients worldwide.

2.2 MPM background

To learn more about his developed GH-Method: math-physical medicine or MPM methodology, readers can select the following three articles from the 400+ published medical papers.

The first paper, No. 386, describes his MPM methodology in a general conceptual format. The second paper, No. 387, outlines the history of his personalized diabetes research, various application tools, and the differences between the biochemical medicine (BCM) approach versus the MPM approach. The third paper, No. 397, depicts a general flow diagram containing ~10 key MPM research methods and different tools.

All of the listed papers in the Reference section are his written and published medical research papers.

2.3 Elasticity, plasticity, viscoelasticity, and viscoplasticity (LEGT & VGT)

The difference between elastic materials and viscoelastic materials (from “Soborthans, innovating shock and vibration solutions”).

What are elastic materials?

Elasticity is the tendency of solid materials to return to their original shape after forces are applied on them. When the forces are removed, the object will return to its initial shape and size if the material is elastic.

Medical analogy: The medical application is when cause or risk factors are reduced or removed, the symptoms of certain disease would be improved or ceased.

What are viscous materials?

Viscosity is a measure of a fluid's resistance to flow. A fluid with large viscosity resists motion. A fluid with low viscosity flows. For example, water flows more easily than syrup because it has a lower viscosity. High viscosity materials might include honey, syrups, or gels – generally things that resist flow. Water is a low viscosity material, as it flows readily. Viscous materials are thick or sticky or adhesive. Since heating reduces viscosity, these materials don't flow easily. For example, warm syrup flows more easily than cold.

What is viscoelastic?

Viscoelasticity is the property of materials that exhibit both viscous and elastic characteristics when undergoing deformation. Synthetic polymers, wood, and human tissue, as well as metals at high temperature, display significant viscoelastic effects. In some applications, even a small viscoelastic response can be significant.

Medical analogy: Viscoelastic behavior means material has “time-dependent” characters. Biomedical data, i.e. biomarkers, are time-dependent due to body cells are organic which changes with time constantly.

Elastic behavior versus viscoelastic behavior

The difference between elastic materials and viscoelastic materials is that viscoelastic materials have a viscosity factor and the elastic ones don't. Because viscoelastic materials have the viscosity factor, they have a strain rate dependent on time. Purely elastic materials do not dissipate energy (heat) when a load is applied, then removed; however, a viscoelastic substance does.

Medical analogy: Most of the biomarkers display time-dependency; therefore they have

both change-rate of time and viscosity factor behaviors. Viscoelastic biomarkers do dissipate energy when a cause force is applied on it.

The following brief introductions are excerpts from Wikipedia:

“Elasticity (physics):

The physical property is when materials or objects return to their original shape after deformation.

In physics and materials science, elasticity is the ability of a body to resist a distorting influence and to return to its original size and shape when that influence or force is removed. Solid objects will deform when adequate loads are applied to them; if the material is elastic, the object will return to its initial shape and size after removal. This is in contrast to plasticity, in which the object fails to do so and instead remains in its deformed state.

Hooke's law states that the force required to deform elastic objects should be directly proportional to the distance of deformation, regardless of how large that distance becomes. This is known as perfect elasticity, in which a given object will return to its original shape no matter how strongly it is deformed. This is an ideal concept only; most materials that possess elasticity in practice remain purely elastic only up to very small deformations, after which plastic (permanent) deformation occurs.

In engineering, the elasticity of a material is quantified by the elastic modulus such as the Young's modulus, bulk modulus or shear modulus which measure the amount of stress needed to achieve a unit of strain; a higher modulus indicates that the material is harder to deform. The material's elastic limit or yield strength is the maximum stress that can arise before the onset of plastic deformation.


Medical analogy: The elastic behavior analogy in medicine can be expressed by the metal rod analogy for the postprandial plasma glucose (PPG). Consuming carbohydrates and/or sugar acts like a tensile force to stretch a metal rod longer, while post-meal exercise acts like a compressive force to suppress a metal rod shorter. If lacking food consumption and exercise, the metal rod

(analogy of PPG) will remain its original length, for a non-diabetes or less severe type 2 diabetes (T2D) patient.

Plasticity (physics):


Deformation of a solid material undergoing non-reversible changes of shape in response to applied forces.

In physics and materials science, plasticity, also known as plastic deformation, is the ability of a solid material to undergo permanent deformation, a non-reversible change of shape in response to applied forces. For example, a solid piece of metal being bent or pounded into a new shape displays plasticity as permanent changes occur within the material itself. In engineering, the transition from elastic behavior to plastic behavior is known as yielding. Plastic deformation is observed in most materials, particularly metals, soils, rocks, concrete, and foams.



A stress-strain curve showing typical yield behavior for nonferrous alloys.

1. True elastic limit
2. Proportionality limit
3. Elastic limit
4. Offset yield strength



A stress-strain is typical of structural steel.

- 1: Ultimate strength
- 2: Yield strength (yield point)
- 3: Rupture
- 4: Strain hardening region
- 5: Necking region

- A: Apparent stress (F/A₀)
- B: Actual stress (F/A)

For many ductile metals, tensile loading applied to a sample will cause it to behave in an elastic manner. Each increment of load is accompanied by a proportional increment in extension. When the load is removed, the piece returns to its original size. However, once the load exceeds a threshold – the yield strength – the extension increases more rapidly than in the elastic region; now when the load is removed, some degree of extension will remain.

Medical analogy: A plastic behavior analogy in medicine is the PPG level of a severe T2D patient. Even consuming a smaller amount of carbs/sugar, the patient’s PPG will rise sharply which cannot be totally brought down to a healthy PPG level even with a significant amount of exercise. This means the PPG level has exceeded its “elastic limit” and entering into a “plastic range”.

Viscoelasticity:

Property of materials with both viscous and elastic characteristics under deformation.

In materials science and continuum mechanics, viscoelasticity is the property of materials that exhibit both viscous and elastic characteristics when undergoing deformation. Viscous materials, like water, resist shear flow and strain linearly with time when a stress is applied. Elastic materials strain when stretched and immediately return to their original state once the stress is removed.

Viscoelastic materials have elements of both of these properties and, as such, exhibit time-dependent strain. Whereas elasticity is usually the result of bond stretching along crystallographic planes in an ordered solid, viscosity is the result of the diffusion of atoms or molecules inside an amorphous material.

In the nineteenth century, physicists such as Maxwell, Boltzmann, and Kelvin researched and experimented with creep and recovery of glasses, metals, and rubbers. Viscoelasticity was further examined in the late twentieth century when synthetic polymers were engineered and used in a variety of applications. Viscoelasticity calculations depend heavily on the viscosity variable, η .

The inverse of η is also known as fluidity, ϕ . The value of either can be derived as a function of temperature or as a given value (i.e. for a dashpot).


Depending on the change of strain rate versus stress inside a material, the viscosity can be categorized as having a linear, non-linear, or plastic response. In addition, when the stress is independent of this strain rate, the material exhibits plastic deformation. Many viscoelastic materials exhibit rubber-like behaviors explained by the thermodynamic theory of polymer elasticity.

Cracking occurs when the strain is applied quickly and outside of the elastic limit. Ligaments and tendons are viscoelastic, so the extent of the potential damage to them depends both on the rate of the change of their length as well as on the force applied.

A viscoelastic material has the following properties:

- hysteresis is seen in the stress-strain
- stress relaxation occurs: step constant strain causes decreasing stress
- creep occurs: step constant stress causes increasing strain
- its stiffness depends on the strain rate or the stress rate.

Elastic versus viscoelastic behavior:

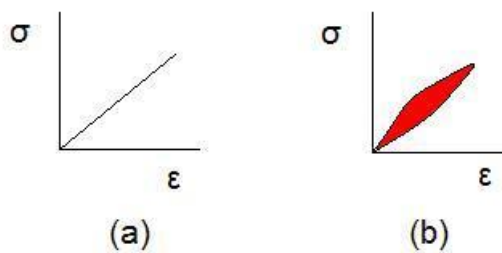

Stress-strain curves for a purely elastic material (a) and a viscoelastic material (b). The red area is a hysteresis loop and shows the amount of energy lost (as heat) in a loading and unloading cycle. It is equal to $\oint \sigma d\epsilon$ where σ is stress and ϵ is strain. In other words, the hysteresis loop area represents the amount of energy during the loading and unloading process.

Unlike purely elastic substances, a viscoelastic substance has an elastic

component and a viscous component. The viscosity of a viscoelastic substance gives the substance a strain rate dependence on time. Purely elastic materials do not dissipate energy (heat) when a load is applied, then removed. However, a viscoelastic substance dissipates energy when a load is applied, then removed. Hysteresis is observed in the stress-strain curve, with the area of the loop being equal to the energy lost during the loading cycle. Since viscosity is the resistance to thermally activated plastic deformation, a viscous material will lose energy through a loading cycle. Plastic deformation results in lost energy, which is uncharacteristic of a purely elastic material's reaction to a loading cycle.

Viscoplasticity:

Viscoplasticity is a theory in continuum mechanics that describes the rate-dependent inelastic behavior of solids. Rate-dependence in this context means that the deformation of the material depends on the rate at which loads are applied. The inelastic behavior that is the subject of viscoplasticity is plastic deformation which means that the material undergoes unrecoverable deformations when a load level is reached. Rate-dependent plasticity is important for transient plasticity calculations. The main difference between rate-independent plastic and viscoplastic material models is that the latter exhibit not only permanent deformations after the application of loads but continue to undergo a creep flow as a function of time under the influence of the applied load.

Medical analogy: In viscoelastic or viscoplastic analysis, the stress component equals the strain change rate of time multiplying with the viscosity factor, or

$$\begin{aligned} \text{Stress } (\sigma) &= \text{strain } (\epsilon) \text{ change rate} * \text{viscosity factor } (\eta) \\ &= d\epsilon/dt * \eta \end{aligned}$$

$$\begin{aligned} \text{The hysteresis loop area} &= \text{the integrated area of stress } (\sigma) \text{ and strain } (\epsilon) \text{ curve} \\ &= \oint \sigma d\epsilon \end{aligned}$$

Note: For a more detailed description, please refer to the “consolidated method” section which is given at the beginning of the special issue.

3. RESULTS

Figure 1 shows the time-domain analysis results of CVD risk, eAG, BW, and food portion with multiple correlations for 11 years.

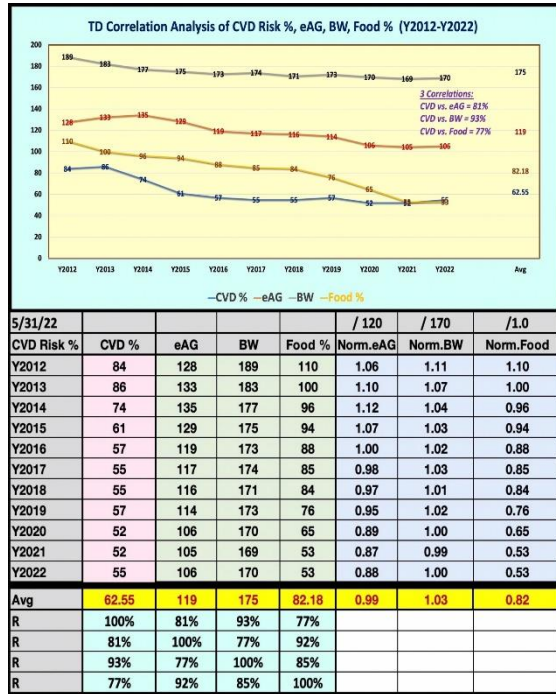


Figure 1: Time-domain analysis results of CVD risk, eAG, BW, and food portion with multiple correlations during 11 years.

Figure 2 depicts the space-domain VGT stress-strain analysis results of CVD risk, eAG, BW, and food portion over 11 years.

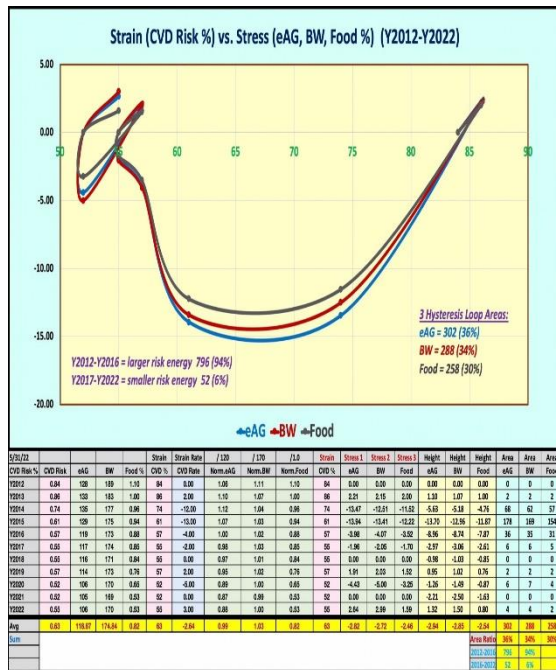


Figure 2: Space-domain VGT stress-strain analysis results of CVD risk, eAG, BW, and food portion during 11 years.

4. CONCLUSION

In summary, there are 3 observations from this VGT analysis of CVD Risk % versus eAG, body weight, and food quantity %:

(1) From the time domain analysis of the collected data from 11 years (Figure 1), the calculated correlations are: CVD vs. eAG = 81%; CVD vs. BW = 93%; CVD vs. FOOD = 77%. It is obvious that the statistical correlation analysis results have shown that, with a sufficiently large time window of 11 years of data, 3 high positive correlations are observed with CVD risk % versus eAG, BW, and food quantity %, respectively. Nevertheless, the following biomedical observation holds true that both diabetes (eAG) and obesity (BW) together determine the degree of risk of having CVD episodes due to a patient's lifestyle management, especially the food portion % (along with food quality) which directly contributes to BW, while food quality, such as carbs, would influence both of CVD risk and diabetes conditions.

(2) Researching the part of strain variation from the VGT results (Figure 2), we have seen that his CVD risk % decreased from 86% in Y2013 to 52% in Y2021. His eAG started at 128 mg/dL in Y2012 to 135 mg/dL in Y2014 and then dropped to 105 mg/dL in Y2021. His body weight started at 189 lbs. in Y2012 and decreased to 169 lbs. in Y2021. His food portion % started from 110% in Y2012 and decreased to 53% in Y2022. Generally speaking, all 3 biomarkers, CVD risk, eAG, BW, and his lifestyle's food portion % are decreasing year after year. It should be pointed out that the strain (CVD) change rates determine the basic waveform patterns of the 3 stress-strain curves resulting from eAG, BW, and food %.

(3) Researching the stress-strain diagrams from the VGT analysis results (Figure 2), the 3 stress-strain curves' general waveform patterns are similar to each other due to their identical strain (CVD) change rates. However, the 3 different normalized viscosities, i.e. eAG, BW, and food, decide the final detailed shapes and hysteresis loop areas of the 3 stress-strain curves. The combination of strain and stress components affects the actual size of the hysteresis loop area or its associated energy level, i.e. the

degree of influence of the stresses on the strain. The conclusive observation from this stress-strain diagram is that eAG has generated the largest share of energy 302 (36%) which means eAG (diabetes) has the largest influence on CVD Risk followed by body weight (obesity) of 288 (34%) and food portion of 258 (30%). Another important observation is that the first 5-year sub-period of Y2012-Y2016 contributed 796 (94%) of the total CVD risk over the 11 years while the subsequent 6-year sub-period of Y2017-Y2022 contributed 52 (6%) of the total CVD risk over the 11 years.

This VGT energy tool adopted from engineering and physics can indeed provide some interesting clues for useful interpretation of results from this particular research work on CVD Risk versus eAG, body weight, and food portion %. If the author continues his “bad” stress-strain pattern of

the first sub-period into the second sub-period, his health and life would be seriously threatened by the possibility of having either heart attack or stroke and most likely would not be able to live into the year of 2022.

5. REFERENCES

For editing purposes, the majority of the references in this paper, which are self-references, have been removed. Only references from other authors' published sources remain. The bibliography of the author's original self-references can be viewed at www.eclaircmd.com.

Readers may use this article as long as the work is properly cited, their use is educational and not for profit, and the author's original work is not altered.

Viscoelastic and Viscoplastic Glucose Theory Application in Medicine

Gerald C. Hsu

